


198.95 EUR  
incl. 19% VAT, plus [shipping](#)

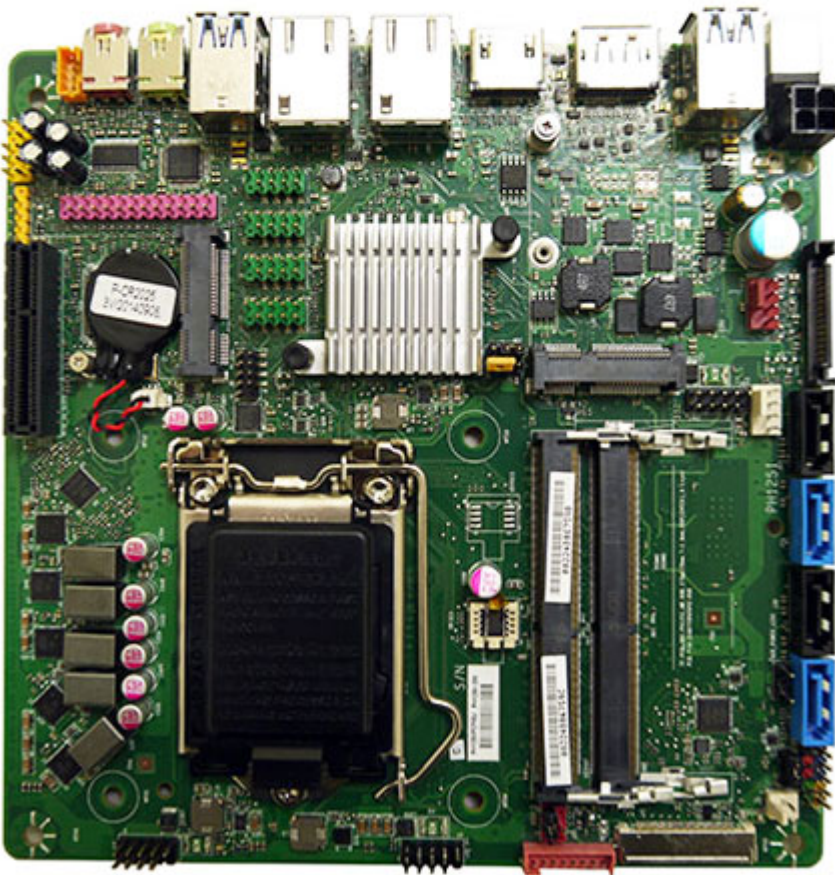

Support:  [Specifications](#)

- Support 6th generation (Skylake) Intel® Core™ i7, i5, i3 processors
- Dual channel DDR4 260-pin SO-DIMM
- Intel® vPro business-grade technology support (with Q170 chipset)
- Dual high speed Gigabit Ethernet connection
- Two PCI Express Mini Card connector for expansion
- Features 3/4 SATA3 (6Gbps)
- Dual display connectivity by DP-out & HD-out
- Embedded LVDS/eDP connectivity
- Onboard 2/4 serial ports

| Item        | Spec  |
|-------------|---|
| Form Factor | Low-profile Mini-ITX (20 millimeters [0.79 inches] x 170.18 millimeters [6.7 inches] x 170.18 millimeters [6.7 inches]) |

|                                   |  |   |
|-----------------------------------|--|---|
| Processor                         | CPU Type : Intel Skylake-S Desktop platform<br>CPU Core : Dual Core / Quad Core<br>Socket : Socket LGA1151<br>TDP : Support up to 65W CPU types  |   |
| Chipset                           | Chipset Series : Intel® Q170 Chipset (Sku-D/I)<br>Chipset Series : Intel® H110 Chipset (Sku-B)<br>Memory Type: DDR4 @ 1.2V, 2133MHz (Unbuffered Non-ECC)<br>Memory Channel: Dual Channel |   |
| Memory                            | Memory Capacity : Support total up to 16 GB<br>ECC Support : No<br>Memory Socket: 260-pin So-DIMM socket   | 2   |
| Display                           | DP & HD-out connector<br>40P Embedded LVDS/eDP connector<br>Codec: HD audio codec, Realtek ALC662  |   |
| Audio                             | 1 x front audio Header (Mic/HP)<br>1 x standard header for DMIC<br>1 x audio header to support system stereo speaker   |   |
| Expansion Capability              | PCIe 3.0 x 4 slot<br>PCI Express Full-/Half-Mini Card slot<br>PCI Express Half-Mini Card slot  | 1<br>1<br>1   |
| Peripheral Interfaces             | USB 2.0 2x5 header<br>Serial port header<br>SATA 3.0 Gb/s  | 3 (Sku-D/I)<br>2 (Sku-B)<br>2<br>4 (Sku-D/I)<br>3 (Sku-B) |
| Legacy I/O                        | Nuvoton NCT6104D   |   |
| Security                          | Intel® vPro™ Technology support<br>TPM security by Nuvoton NPCT650AAAYX (optional)   |   |
| LAN Support                       | Intel® I219 Gigabit (10/100/1000 Mb/s) LAN<br>Intel® I210 Gigabit (10/100/1000 Mb/s) LAN   |   |
| BIOS                              | Support for Advanced Configuration and Power Interface (ACPI) setting  |   |
| Instantly Available PC Technology | Suspend to RAM support<br>Wake on PCI Express, LAN, front panel, serial, and USB ports   |   |
| Hardware Monitor Subsystem        | Hardware monitoring through the Nuvoton6104D legacy I/O controller, including:<br>Remote thermal sensor<br>Speed control for 4-pin system fan header and 4-pin CPU fan header            |   |
| Power Requirement                 | DC-in 19V(7.4mm/ ID, 5.0mm/ OD)/ ATX 4pin 19V (Sku-D/B)<br>DC-in 12V/19V (2.5mm/ ID, 5.5mm/ OD)/ ATX 4pin 12V (Sku-I)  |   |
| Environment                       | Operating Temperature: 0 °C to +50 °C<br>Storage Temperature: -20°C to +70°C   |   |
| Safety                            | CE<br>FCC  |   |